



**Item Description**




- Mounting Type-** Surface
- Housing-** Heavy Duty Die-cast aluminium
- Diffuser-** Antiglare PMMA
- Reflector-** Asymmetric 180° | 360°
- Life Span-** > 50,000 Hrs (Ta = 30°C LM70)
- Option-** Non Dimmable / Dimmable DALI / 0~ 10V/ Triac
- Standards-** EN60598-1 / EN60595-2-1

**Objective**

New Indirect Architectural Garden, Park Column Lighting Series in Power LED Version providing precision optical system which gives very low glare rating, while reducing light pollution.

It can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting.

CODE	WATTAGE	DIA	CRI	KELVINS
LASEEL-36	36W	140mm	≥80	3000K-6000K
LASEEL-54	54W	200mm	≥80	3000K-6000K

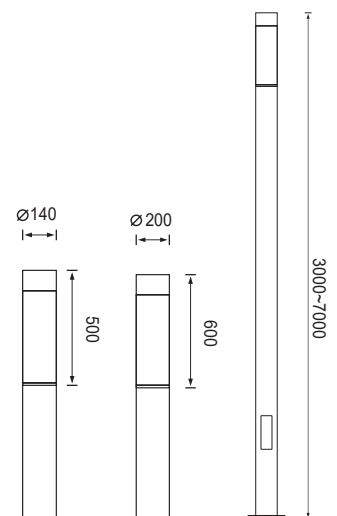

**Colours**



01. White 02. Black 03. Silver Grey 04. Graphite