




Item Description

Mounting Type- Surface Mounted
Housing- Aluminum
Diffuser- Acrylic
Reflector- Aluminum
Life Span- > 50,000 Hrs (Ta = 30°C LM70)
Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac
Standards- EN60598-1 / EN60595-2-1

Objective

Using our latest technology to make a combination between decoration & efficiency.
 POOK-10-15-20 is simple surface mounted downlight with various wattages.
 It can be used in Retails, Residentials and Hotels.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
POOK-10	10W	780lm	>80	2700-3200K/3800-4200K/5700-6000K	-
POOK-15	15W	1150lm	>80	2700-3200K/3800-4200K/5700-6000K	-
POOK-20	20W	1600lm	>80	2700-3200K/3800-4200K/5700-6000K	-

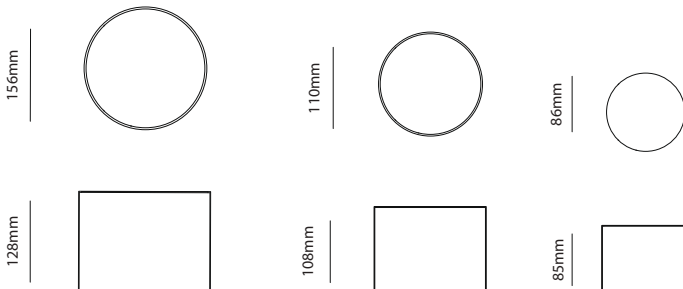

Colours

01

02

03

01. Matt White 02. Black 03. Sand White