




Item Description

Mounting Type- Ceiling Recessed
Housing- Die-Cast Aluminum
Diffuser- PMMA
Reflector- White
Life Span- > 50,000 Hrs (Ta = 30°C LM70)
Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac
Standards- EN60598-1 / EN60595-2-1

Objective

Using our latest technology to make a combination between decoration & efficiency.
 PERILLIX-09-15-20 is round, slim trim and deep frame with total high <25mm. Aluminum PCB equipped with SMD light source center emitting.
 It can be used in Retail, Residential and Hotels.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
PERILLIX-09	9W	800lm	>80	2700-3200K/3800-4200K/5700-6000K	Ø100x146mm
PERILLIX-15	15W	1370lm	>80	2700-3200K/3800-4200K/5700-6000K	Ø132x178mm
PERILLIX-20	20W	1800lm	>80	2700-3200K/3800-4200K/5700-6000K	Ø152x198mm

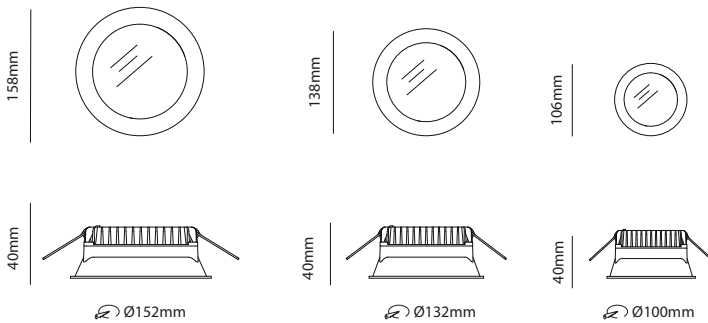

Colours

01 02 03 04

01. White 02. Black 03. Silver 04. Grey