



Drivers **bluelunar** TCI Helvar





**Item Description**

**Mounting Type-** Recessed  
**Housing-** Aluminum  
**Diffuser-** Frosted/Clear  
**Reflector-** Aluminum  
**Life Span-** > 50,000 Hrs (Ta = 30°C LM70)  
**Option-** Non Dimmable / Dimmable DALI / 0~ 10V/ Triac  
**Standards-** EN60598-1 / EN60595-2-1

**Objective**

Rectangular LED grille downlight is unique designed with COB high power LED chip. High efficient reflector with COB LED provides high lumen output and wide beam angle.  
 Single head, double head and triple head provided for wide choice. Adjustable lighting direction offers various lighting orientation.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
U-GRILL-1	8W	460-550lm	80/90	2700K/3000K/4000K/5000K/5000K	L100xW100xH135mm
U-GRILL-2	16W	1040-1250lm	80/90	2700K/3000K/4000K/5000K/5000K	L180xW100xH135mm
U-GRILL-3	24W	1550-1700lm	80/90	2700K/3000K/4000K/5000K/5000K	L260xW100xH135mm

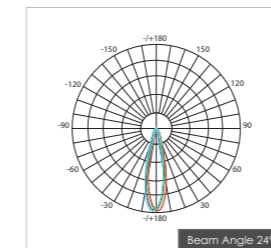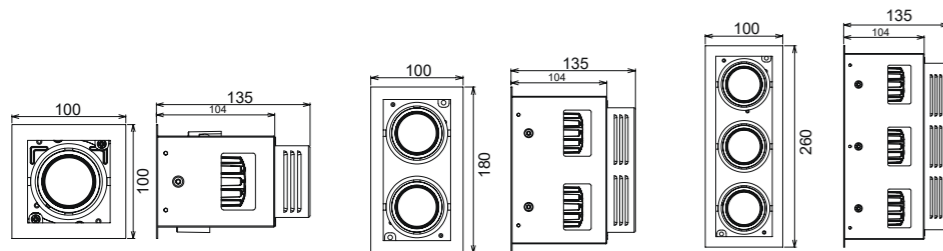

**HIGH EFFICIENT REFLECTOR**

With COB LED provides high lumen output and wide beam angle

