



RECESSED DOWNLIGHTS

**bluelunar**  
LIGHTING LTD.



Drivers **bluelunar** **TCI** **Helvar**





**Item Description**

**Mounting Type-** Recessed  
**Housing-** Aluminum  
**Diffuser-** PMMA  
**Life Span-** > 50,000 Hrs (T<sub>a</sub> = 30°C LM70)  
**Option-** Non Dimmable / Dimmable DALI / 0- 10V/ Triac  
**Standards-** EN60598-1 / EN60595-2-1

**Objective**

SMD LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output. White, silver, chrome surface treatments are available for wide choice.  
 Triac dimmable, 0-10V dimmable and DALI dimmable version share great popularity by excellent dimming effect.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
UQUINE-13	13W	900lm	80/90	2700K/3000K/4000K/5000K/5000K	Ø110x41.5mm

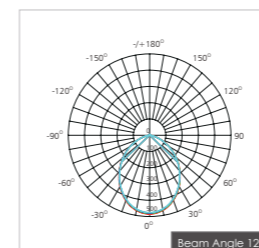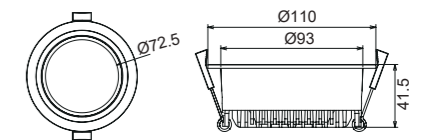

**Colours**

01 02 03

01. White 02. Chrome 03. Silk White