




## Application

This architectural-grade step light is designed to deliver precise, asymmetric illumination for outdoor pathways, staircases, and landscape features. Engineered with a robust housing and sealed to IP65 standards, it ensures reliable performance in harsh weather conditions while enhancing safety and visual appeal.

## Product Specification

Model	BL-VLS3002A/ 3002B
Power	6/13W
LED Type	lumileds 2835
Driver	OSRAM/TRIDONIC
Luminous lux	500lm/1200lm
CCT	3000K/4000K/6500K
CRI	>80
Beam angle	Asymetric°
Input Voltage	AC220-240V/50-60Hz
IP rating	IP65
Dimension (mm)	A.120*B55*C70 / A.250*B98*C90MM
Cut out (mm)	N/A
Life Time	50000H
Working Temp	-20°C ~ +55°C
Housing material	Die Cast Aluminum
Diffuser	Polycarbonate
Finishing	Light Grey / Dark Grey / Black
Cable	Closed wires

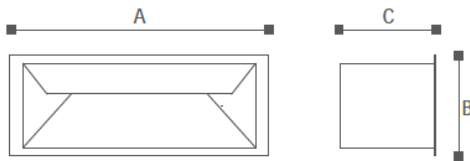

## Options

Dimmable	Yes
Emergency	N/A

## Accessories

Screw	YES
Embedded part	N/A
Water stopper	N/A
Honeycomb cover	N/A