



Item Description



Mounting Type- Pendant / Surface
Housing- High quality PC
Diffuser- Milky PC
Life Span- > 50,000 Hrs (Ta = 30°C LM70)
Option- Non Dimmable / Dimmable DALI / 0- 10V/ Triac
Standards- EN60598-1 / EN60595-2-1

Objective

The design of batten realizes low cost, simple construction and superior capability, milky PC diffuser achieves anti-glare and high light transmittance. It is made of high lumen 2835SMD led chip, energy saving, instant start, no flickering, no noise & UV/IR radiation, environmental friendly without Mercury or any other hazardous substances.

It is a high efficient and low cost product with quite large potential market. Ideal replacement for various applications such as workshop, warehouse, exhibition hall, factory, shop, supermarket etc.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
UPBATTEN-20	20W	1920-2060lm	80/90	2700K/3000K/4000K/5000K/5700K	L625*W58.5*H58.5mm
UPBATTEN-40	40W	3760-3960lm	80/90	2700K/3000K/4000K/5000K/5700K	L1225*W58.5*H58.5mm
UPBATTEN-42	42W	3760-3960lm	80/90	2700K/3000K/4000K/5000K/5700K	L1225*W58.5*H58.5mm
UPBATTEN-45	45W	4460-4860lm	80/90	2700K/3000K/4000K/5000K/5700K	L1525*W58.5*H58.5mm
UPBATTEN-47	47W	4460-4860lm	80/90	2700K/3000K/4000K/5000K/5700K	L1525*W58.5*H58.5mm

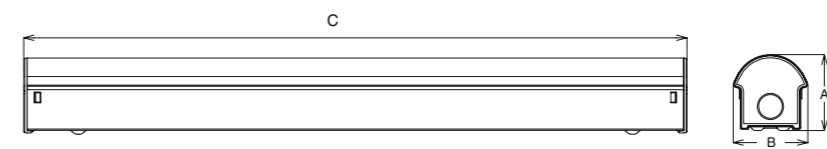

UPBATTEN