




Item Description

Mounting Type- Surface Mounted
Housing- Die-Cast Aluminum
Diffuser- Grid Glass
Reflector- Aluminum
Life Span- > 50,000 Hrs (Ta = 30°C LM70)
Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac
Standards- EN60598-1 / EN60595-2-1


Objective

PARO-15-25 is adjustable COB downlight with various wattages.
 It can be used in Hotels, Brand chains, Homes and so on.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
PARO-15	15W	1150lm	>80	2700-3200K/3800-4200K/5700-6000K	Ø110x120mm
PARO-25	25W	2100lm	>80	2700-3200K/3800-4200K/5700-6000K	Ø138x150mm

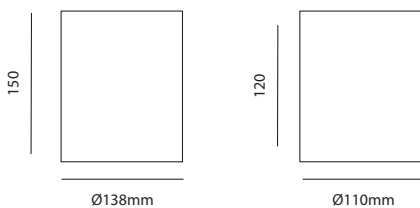

Colours



01. Matt White 02. Sand White 03. Black