# bluelunar




Drivers bluelunor TCI Helvar

000000

# bluelunar

CE ROHS Alu. IES IP20

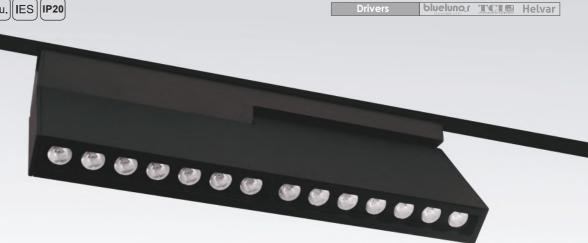




With LED Diffuser

## Item Description

Mounting Type- Track Housing- Aluminum Diffuser- PC (Optional) Life Span- > 50,000 Hrs (Ta = 30°C LM70) Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac Standards- EN60598-1 / EN60595-2-1

CODE	WATTAGE	LUMENS	CRI	DIMENSIONS
MAGNET 9 (Lens)	9W	600lm	High	161.5x135x25xmm
MAGNET 9x2 (Diffuser)	9W	400lm		161.5x135x25xmm

## □● □□□□□:●□



## Objective

Track light with aluminum housing having lens and LED diffuser. Low voltage circuit design and external driver makes it be very safe. Built with magnetic system, the light can be inserted into track easily.

Fold able structure, you can change the beam angle within one minute and adjust it from 0-90 degree. LED diffuser makes the light be very even and soft (Optional. LED lens makes the light be more focused (Optional LED lens), suitable for accent lighting.




With LED Diffuser

Item Description


Mounting Type- Track Housing- Aluminum Diffuser- PC (Optional) Life Span- > 50,000 Hrs (Ta = 30°C LM70) Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac Standards- EN60598-1 / EN60595-2-1

CODE	WATTAGE	LUMENS	CRI	DIMENSIONS
MAGNET 9x2 (Lens)	9x2W	1200lm	High	266x161.5x25xmm
MAGNET 9x2 (Diffuser)	9x2W	800lm	High	266x161.5x25xmm

### 0000000 000000000



### Optic Lens



www.bluelunar.net

www.bluelunar.net

### Objective

Track light with aluminum housing having lens and LED diffuser. Low voltage circuit design and external driver makes it be very safe. Built with magnetic system, the light can be inserted into track easily.

Fold able structure, you can change the beam angle within one minute and adjust it from 0-90 degree. LED diffuser makes the light be very even and soft (Optional. LED lens makes the light be more focused (Optional LED lens), suitable for accent lighting.

