




UTON SQUARE

bluelunar
LIGHTING LTD.



Drivers **bluelunar** **TCI** **Helvar**

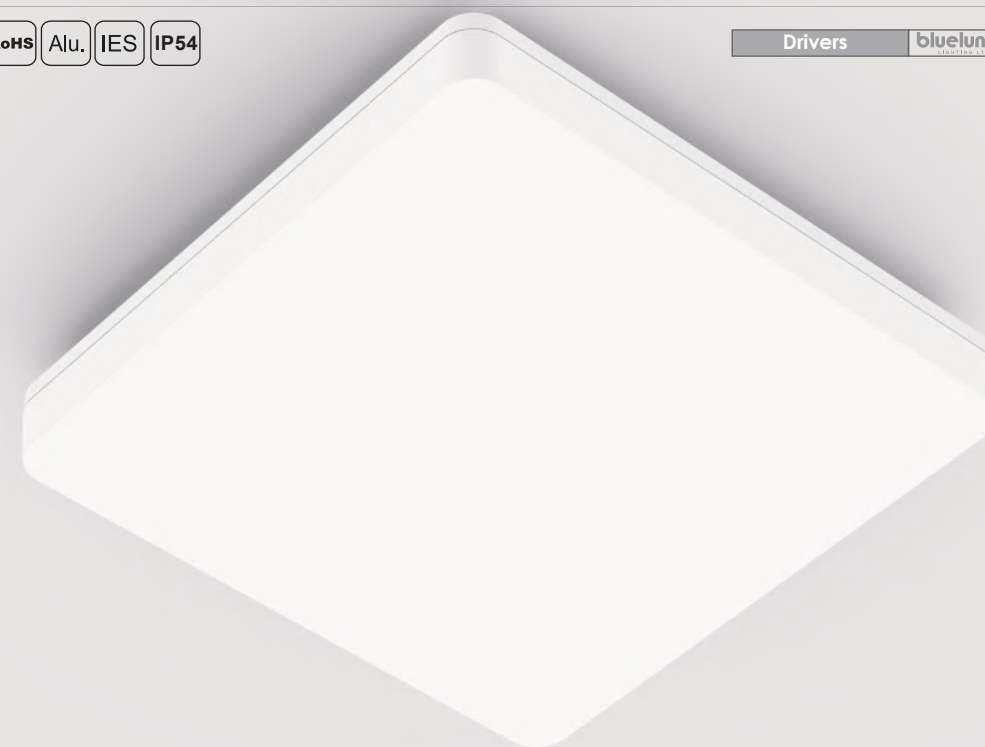

Item Description

Mounting Type- Surface Mounted
Housing- High quality PC
Diffuser- Fire rated PC
Life Span- > 50,000 Hrs (Ta = 30°C LM70)
Option- Non Dimmable / Dimmable DALI / 0~ 10V/ Triac
Standards- EN60598-1 / EN60595-2-1

Objective

Ceiling light adopts high lumen SMD LED, PC diffuser with even light output. High PF LED driver with Triac dimmable function, 120° wide beam angle. IP54 waterproof structural design, ideal replacement for halogen in damp locations.

Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, workshop, warehouse, home etc.

CODE	WATTAGE	LUMENS	CRI	KELVINS	DIMENSIONS
UTON SQUARE-12	12W	1320lm	80/90	2700K/3000K/4000K/5000K/5000K	250x250x50mm
UTON SQUARE-18	18W	1960lm	80/90	2700K/3000K/4000K/5000K/5000K	300x300x58mm
UTON SQUARE-25	25W	2635lm	80/90	2700K/3000K/4000K/5000K/5000K	400x400x63mm
UTON SQUARE-30	30W	3160lm	80/90	2700K/3000K/4000K/5000K/5000K	400x400x63mm

